



外形尺寸 Outline Dimensions

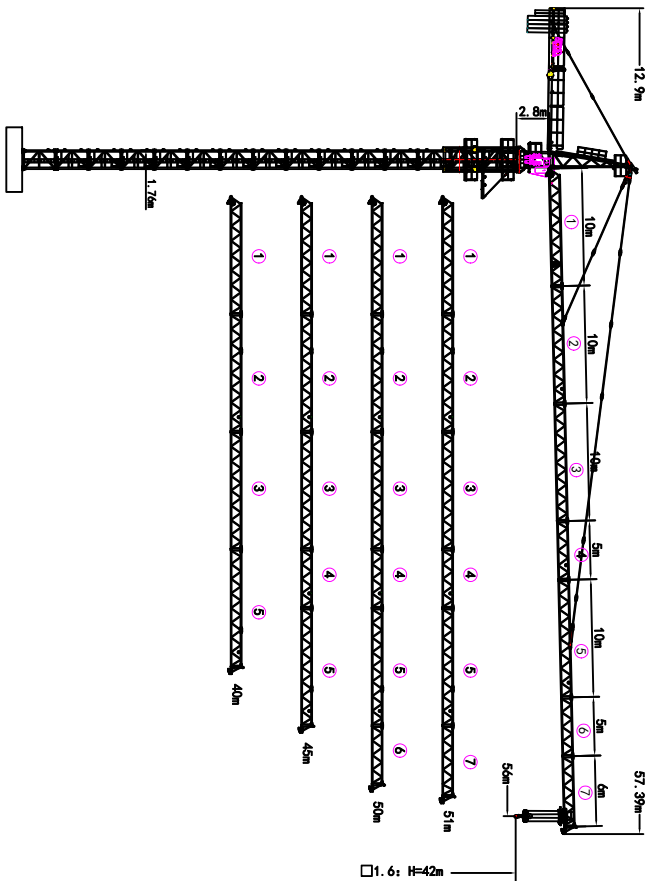

塔身截面 Masts

| | |
|----|------|
| 16 | 42 |
| 14 | 39.2 |
| 13 | 36.4 |
| 12 | 33.6 |
| 11 | 30.8 |
| 10 | 28.0 |
| 9 | 25.2 |
| 8 | 22.4 |
| 7 | 19.6 |
| 6 | 16.8 |
| 5 | 14.0 |
| 4 | 11.2 |
| 3 | |
| 2 | |
| 1 | |

附着 Anchorages



| Mast | A | B | C | H |
|------|-------|-------|------|------|
| □ | 6.35m | 22.4m | 4.2m | 150m |

● 工作状态应力 In service Reaction ■ 非工作状态应力 Out of service Reaction
 ○ 不平衡力及制动力制动力矩 Total weight of free standing crane (including counter weight & ballast)

附墙道数: Number of the collar= (H-A)÷8m

载荷特性表 Load Diagrams 6t

| R _{max} | Fail | R _{Cmax} | C _{max} | 15 | 20 | 25 | 30 | 35 | 40 | 45 | 50 | 51 | 55 | 56 |
|------------------|------|-------------------|------------------|------|------|------|------|------|------|------|------|------|------|----|
| 56m | 16.5 | 6.0 | 6.0 | 4.81 | 3.69 | 2.94 | 2.41 | 2.02 | 1.71 | 1.47 | 1.43 | 1.27 | 1.24 | |
| 51m | 30.0 | 3.0 | 3.0 | 3.0 | 3.0 | 3.0 | 3.0 | 2.47 | 2.08 | 1.77 | 1.53 | 1.49 | 1.33 | |
| 51m | 17.1 | 6.0 | 6.0 | 5.02 | 3.85 | 3.13 | 2.53 | 2.12 | 1.80 | 1.51 | 1.51 | | | |
| 51m | 31.0 | 3.0 | 3.0 | 3.0 | 3.0 | 3.0 | 2.59 | 2.18 | 1.87 | 1.61 | 1.57 | | | |
| 50m | 17.3 | 6.0 | 6.0 | 5.09 | 3.91 | 3.18 | 2.56 | 2.15 | 1.83 | 1.58 | | | | |
| 50m | 31.4 | 3.0 | 3.0 | 3.0 | 3.0 | 3.0 | 2.62 | 2.21 | 1.89 | 1.64 | | | | |
| 45m | 17.6 | 6.0 | 6.0 | 5.14 | 3.95 | 3.23 | 2.61 | 2.19 | 1.87 | | | | | |
| 45m | 35.1 | 3.0 | 3.0 | 3.0 | 3.0 | 3.0 | 2.66 | 2.25 | | | | | | |
| 40m | 17.6 | 6.0 | 6.0 | 5.14 | 3.95 | 3.23 | 2.61 | 2.19 | | | | | | |
| 40m | 35.1 | 3.0 | 3.0 | 3.0 | 3.0 | 3.0 | 2.66 | 2.25 | | | | | | |

机构 Mechanisms 6t

| 名称 | □ | | ■ | | 容绳量 m | 电机功率 kW |
|---------------|-------------------|-----|-------|-------|--------------|------------|
| | m/min | t | m/min | t | | |
| 起升 Hoisting | 24LD15 | 80 | 1.5 | 3.0 | 360 | 24/24/5.4 |
| | | 40 | 3.0 | 6.0 | | |
| | | 8.5 | 3.0 | 6.0 | | |
| 变幅 Trolleying | BP4030X | | 0-40 | m/min | | 3.0 |
| 回转 Swivling | 2RP4 | | 0-0.6 | rpm | | 4.0×2 |
| 电源 Power | 380V (±10%) /50Hz | | | | 24LD15: 35kW | |

平衡重 Counter weight

| 高度 | 重量 | 型号 | 数量 |
|-----|-------|---------|----|
| 56m | 12.9m | PHZ3250 | 4 |
| 51m | 12.9m | PHZ1000 | 2 |
| 51m | 12.9m | 15000KG | 4 |
| 50m | 12.9m | 14000KG | 4 |
| 50m | 12.9m | 14000KG | 4 |
| 45m | 12.9m | 13000KG | 4 |
| 40m | 12.9m | 10750KG | 3 |