




外形尺寸 Outline Dimensions

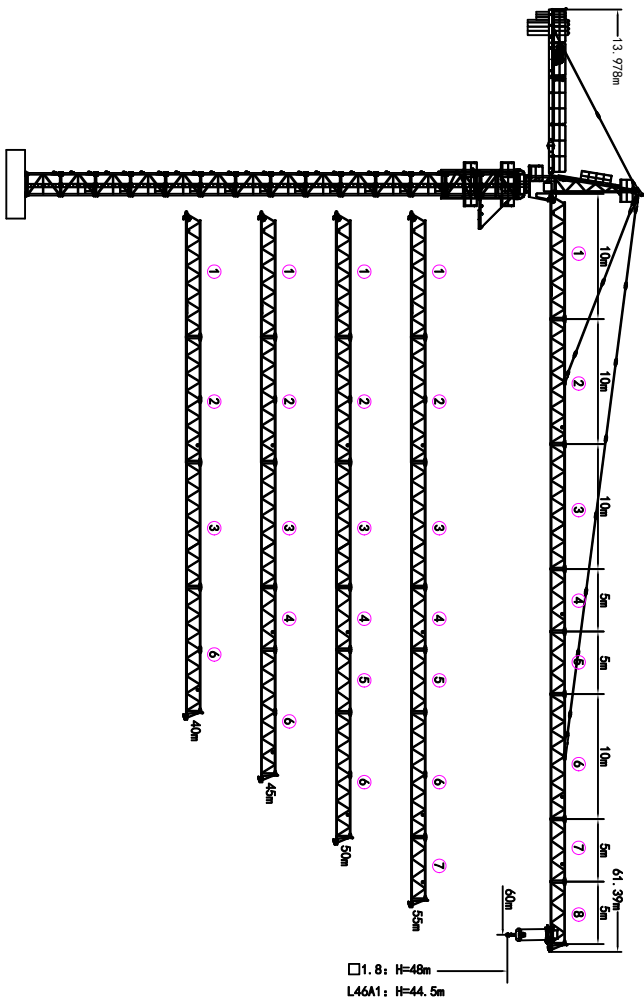

塔身截面 Masts

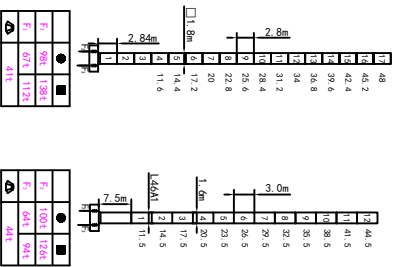

附着 Anchorages

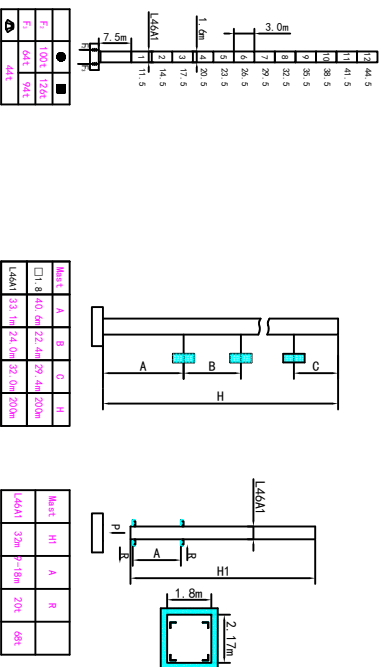

● 工作状态总反力 In service Reaction ■ 非工作状态总反力 Out of service Reaction
 ◎ 不平衡力及总制动力制动力矩 Total weight of free standing crane (unbalanced counter weight & ball weight)

附墙道数: Number of the collar= (H-A)÷8+1

载荷特性表 Load Diagrams 10t

R _{max}	Fail	R _{Cmax}	C _{max} (1)	15	20	25	30	35	40	45	50	55	60
60m	13.0	10.0	8.53	6.09	4.66	3.72	3.05	2.56	2.17	1.87	1.62	1.41	1.50
55m	23.9	5.0	5.0	4.75	3.81	3.14	2.65	2.26	1.96	1.71	1.50	1.81	
50m	25.7	5.0	5.0	5.0	4.15	3.45	2.91	2.50	2.17	1.90			
45m	14.6	10.0	9.72	6.97	5.36	4.30	3.55	2.99	2.55	2.21			
40m	26.8	5.0	5.0	5.0	4.39	3.64	3.08	2.64	2.30				

载荷特性表 Load Diagrams 8t

R _{max}	Fail	R _{Cmax}	C _{max} (1)	15	20	25	30	35	40	45	50	55	60
60m	15.4	8.0	8.0	5.93	4.56	3.64	3.0	2.52	2.15	1.85	1.61	1.41	1.50
55m	28.3	4.0	4.0	4.0	3.73	3.09	2.61	2.24	1.94	1.70	1.50		
50m	16.7	8.0	8.0	6.50	5.01	4.01	3.32	2.80	2.4	2.07	1.81		
45m	17.4	8.0	8.0	6.85	5.29	4.25	3.52	2.97	2.55	2.21			
40m	32.1	4.0	4.0	4.0	4.0	3.60	3.06	2.64	2.30				

机构 Mechanisms 8/10t

名称	m/min		t		容绳量		电机功率	
	0-80	2.0	0-40	4.0	m	kW		
起升 Hoisting	30LWF20	0-40	4.0	400		30		
10t	4SLVF25	0-80	2.5	500		45		
		0-40	5.0					
变频变频调速	BP0055X	0-60	10.0		5.5			
回转 Slewing	2RVF4	0-0.6	rpm		4.0×2			
电源 Power	380V (±10%) /50Hz	30LWF20 : 43.5kW			4SLVF25 : 58.5kW			

平衡重 Counter weight

塔身高度	平衡重重量	平衡重数量	平衡重型号
60m	13.978m	16040Kg	3
55m	13.978m	14740Kg	3
50m	13.978m	13440Kg	3
45m	13.978m	11440Kg	3
40m	13.978m	10140Kg	3