


外形尺寸 Outline Dimensions



塔身截面 Masts

1	48.5
2	46.7
3	42.9
4	40.1
5	37.3
6	34.5
7	31.7
8	28.9
9	26.1
10	23.3
11	20.5
12	17.7
13	14.9
14	12.1

附着 Anchorages

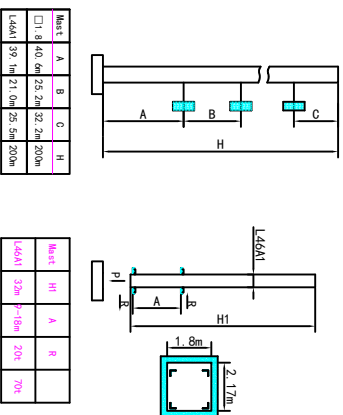

● 工作状态应力 In service Reaction ■ 非工作状态应力 Out of service Reaction
 ◎ 不平衡力及材料附加重量 Total weight of free standing crane (including counter weight & ball weight)

载荷特性表 Load Diagrams

Radius	Full	R _{Crane}	Capacity	20	25	30	35	40	45	50	55	60	65
65m	12.0	10.0	5.68	4.39	3.52	2.91	2.45	2.09	1.80	1.56	1.37	1.20	
	22.7	5.0	5.0	4.49	3.62	3.01	2.55	2.19	1.90	1.66	1.47	1.30	
60m	13.0	10.0	6.25	4.85	3.92	3.26	2.76	2.37	2.06	1.81	1.60		
	24.8	5.0	5.0	4.95	4.02	3.36	2.86	2.47	2.16	1.91	1.70		
55m	13.4	10.0	6.46	5.03	4.07	3.39	2.88	2.48	2.16	1.90			
	25.6	5.0	5.0	5.0	4.17	3.49	2.98	2.58	2.26				
50m	14.5	10.0	7.05	5.50	4.47	3.73	3.18	2.74	2.40				
	27.7	5.0	5.0	5.0	4.57	3.83	3.28	2.84	2.50				
45m	14.6	10.0	7.12	5.57	4.53	3.79	3.23	2.80					
	28.0	5.0	5.0	5.0	4.63	3.89	3.33	2.90					
40m	15.0	10.0	7.32	5.71	4.64	3.87	3.30						
	28.6	5.0	5.0	5.0	4.74	3.97	3.40						
35m	15.5	10.0	7.57	5.91	4.79	4.00							
	29.6	5.0	5.0	5.0	4.89	4.10							
30m	15.5	10.0	7.63	5.99	4.90								
	30.0	5.0	5.0	5.0	5.0								

机构 Mechanisms 8/10t

名称	m/min		t		容量	电机功率
	0-80	0-40	2.0	4.0		
起升 Hoisting	8t	30LWF20	0-40	0-20	500	30
	10t	45LWF25	0-80	0-40	500	45
变幅 Trolleying	BR555X		0-40	0-20		
回转 Slewing	ZRVFS-5		0-0.6	0-55		5.5
电源 Power	380V (±10%) / 50Hz		30LWF20: 46.5kW	45LWF25: 61.5kW		5.5×2

平衡重 Counter weight

半径	重量	型号
65m	14.85m	PHZ2600
		PHZ1000
60m	14.85m	17600KG
		16600KG
55m	14.85m	15600KG
		15000KG
50m	14.85m	13000KG
		12400KG
45m	14.85m	11400KG
		9800KG
35m	14.85m	
30m	14.85m	

附赠资料: Number of the solution: (H-A-D)-8/1