

◎ 部件外形尺寸 Parts dimension & weight

名称 Name	外形 Outline	L(m)	W(m)	H(m)	kg
预埋节 Embedded section		2.78	2.78	1.94	2788
基础节 Base mast		5.80	2.58	2.62	5739
加强节 Reinforced section		5.80	2.58	2.62	5745
标准节 Mast section		5.80	2.58	2.62	5048
顶升节总成 Climbing section assembly		3.63	4.13	3.65	6837
转台总成 Turntable		5.81	3.12	3.20	13345
套架节 Saddle section		11.98	5.05	4.93	13632
平衡臂臂节1 Counter-jib segment 1		11.68	3.77	3.19	6745
平衡臂臂节2 Counter-jib segment 2		4.28	1.93	2.50	2340
平衡臂臂节3 Counter-jib segment 3		10.4	2.07	2.52	7206
起升机构 Hoisting mechanism		2.25	2.41	1.67	3510
起重臂臂节1 Jib section 1		10.4	2.45	2.81	6196
起重臂臂节2 Jib section 2		10.4	2.26	2.47	4781
起重臂臂节3 Jib section 3		10.4	1.45	2.47	3421
起重臂臂节4 Jib section 4		10.36	1.45	2.45	2771
起重臂臂节5 Jib section 5		10.32	1.45	1.92	2389
起重臂臂节6 Jib section 6		5.31	1.45	1.87	838
起重臂臂节7 Jib section 7		10.26	1.45	1.84	1196
起重臂臂节8 Jib section 8		5.19	1.45	1.80	533
起重臂臂节9 Jib section 9		10.18	1.45	1.77	773
起重臂臂节10 Jib section 10		5.18	1.45	1.77	424
臂端节 Jib nose		0.81	1.67	2.28	196
变幅小车 Trolley		4.21	2.20	1.37	1105
吊钩 Hook		2.02	0.37	2.32	973


注: 大汉科技持续创新和优化, 实物与此样本可能存在外观和技术参数的差异, 请以实物为准。
Dahan Technology continues to innovate and optimize. The actual product may differ from this catalog in appearance and technical parameters. Please refer to the actual product for details.

大汉科技股份有限公司 Dahan Technology Co., Ltd.


地址 Address: 山东省济南市章丘区明水经济开发区赭山工业园

Zheshan Industrial Park, Mingshui Economic Development Zone, Zhangqiu District, Jinan City, Shandong Province, China

◎ 外形尺寸 Outline Dimensions

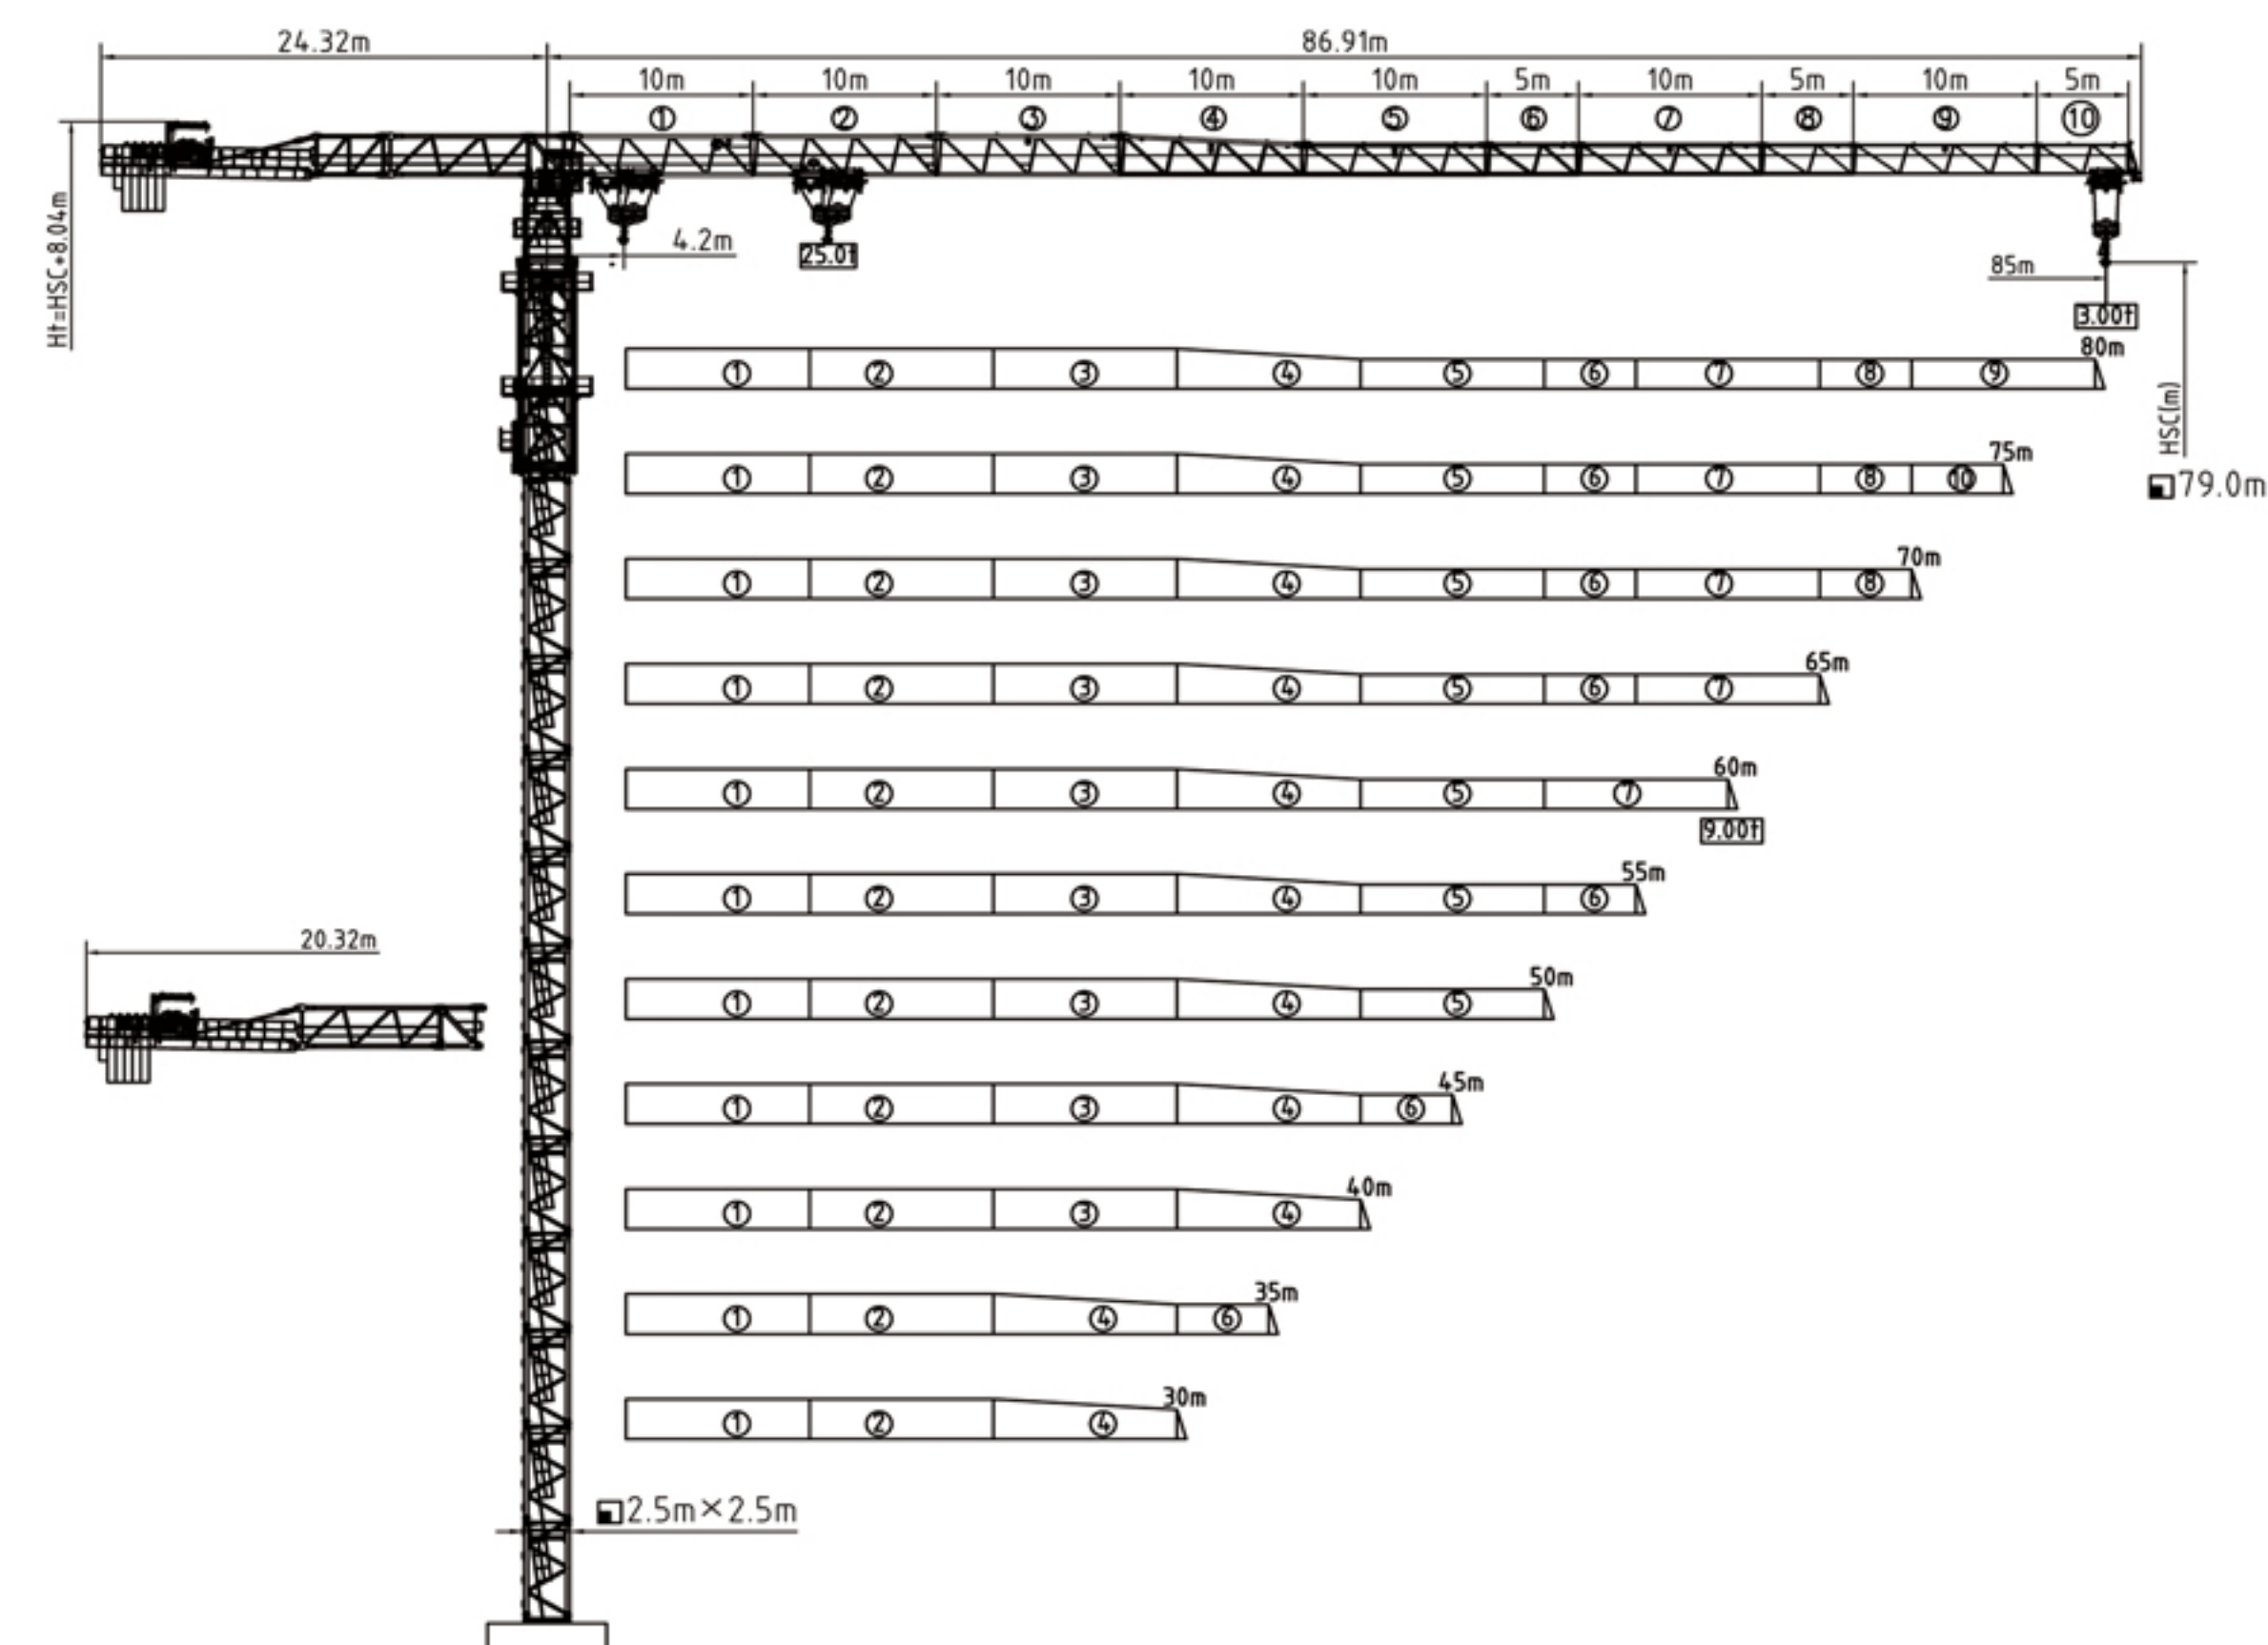

◎ 塔身截面 Masts

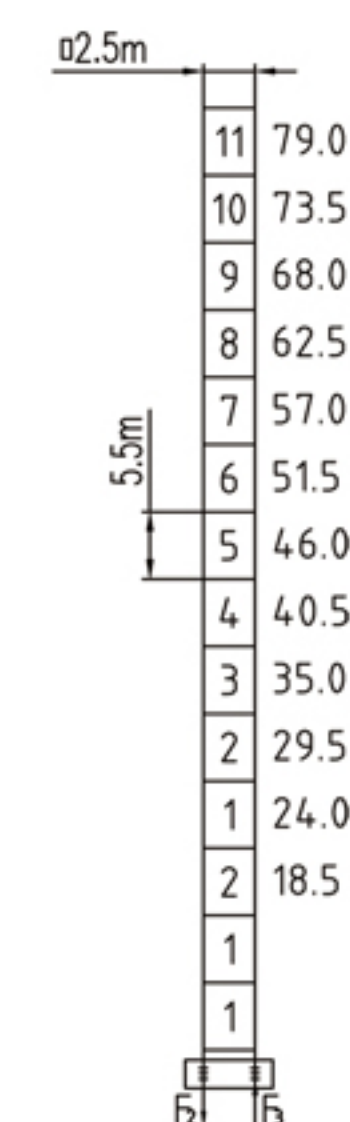


	●	■
F ₂	328t	416t
F ₃	226t	328t
	147 3t	

- 工作状态支反力 Reactions in service
- 非工作状态支反力 Reactions out of service
- ⚠ 不含平衡重及压重, 塔机最大独立起升高度重量
Crane weight(F.S.H) excluding counter weight & chassis

附着 Anchorages

2.5m×2.5×5.5m

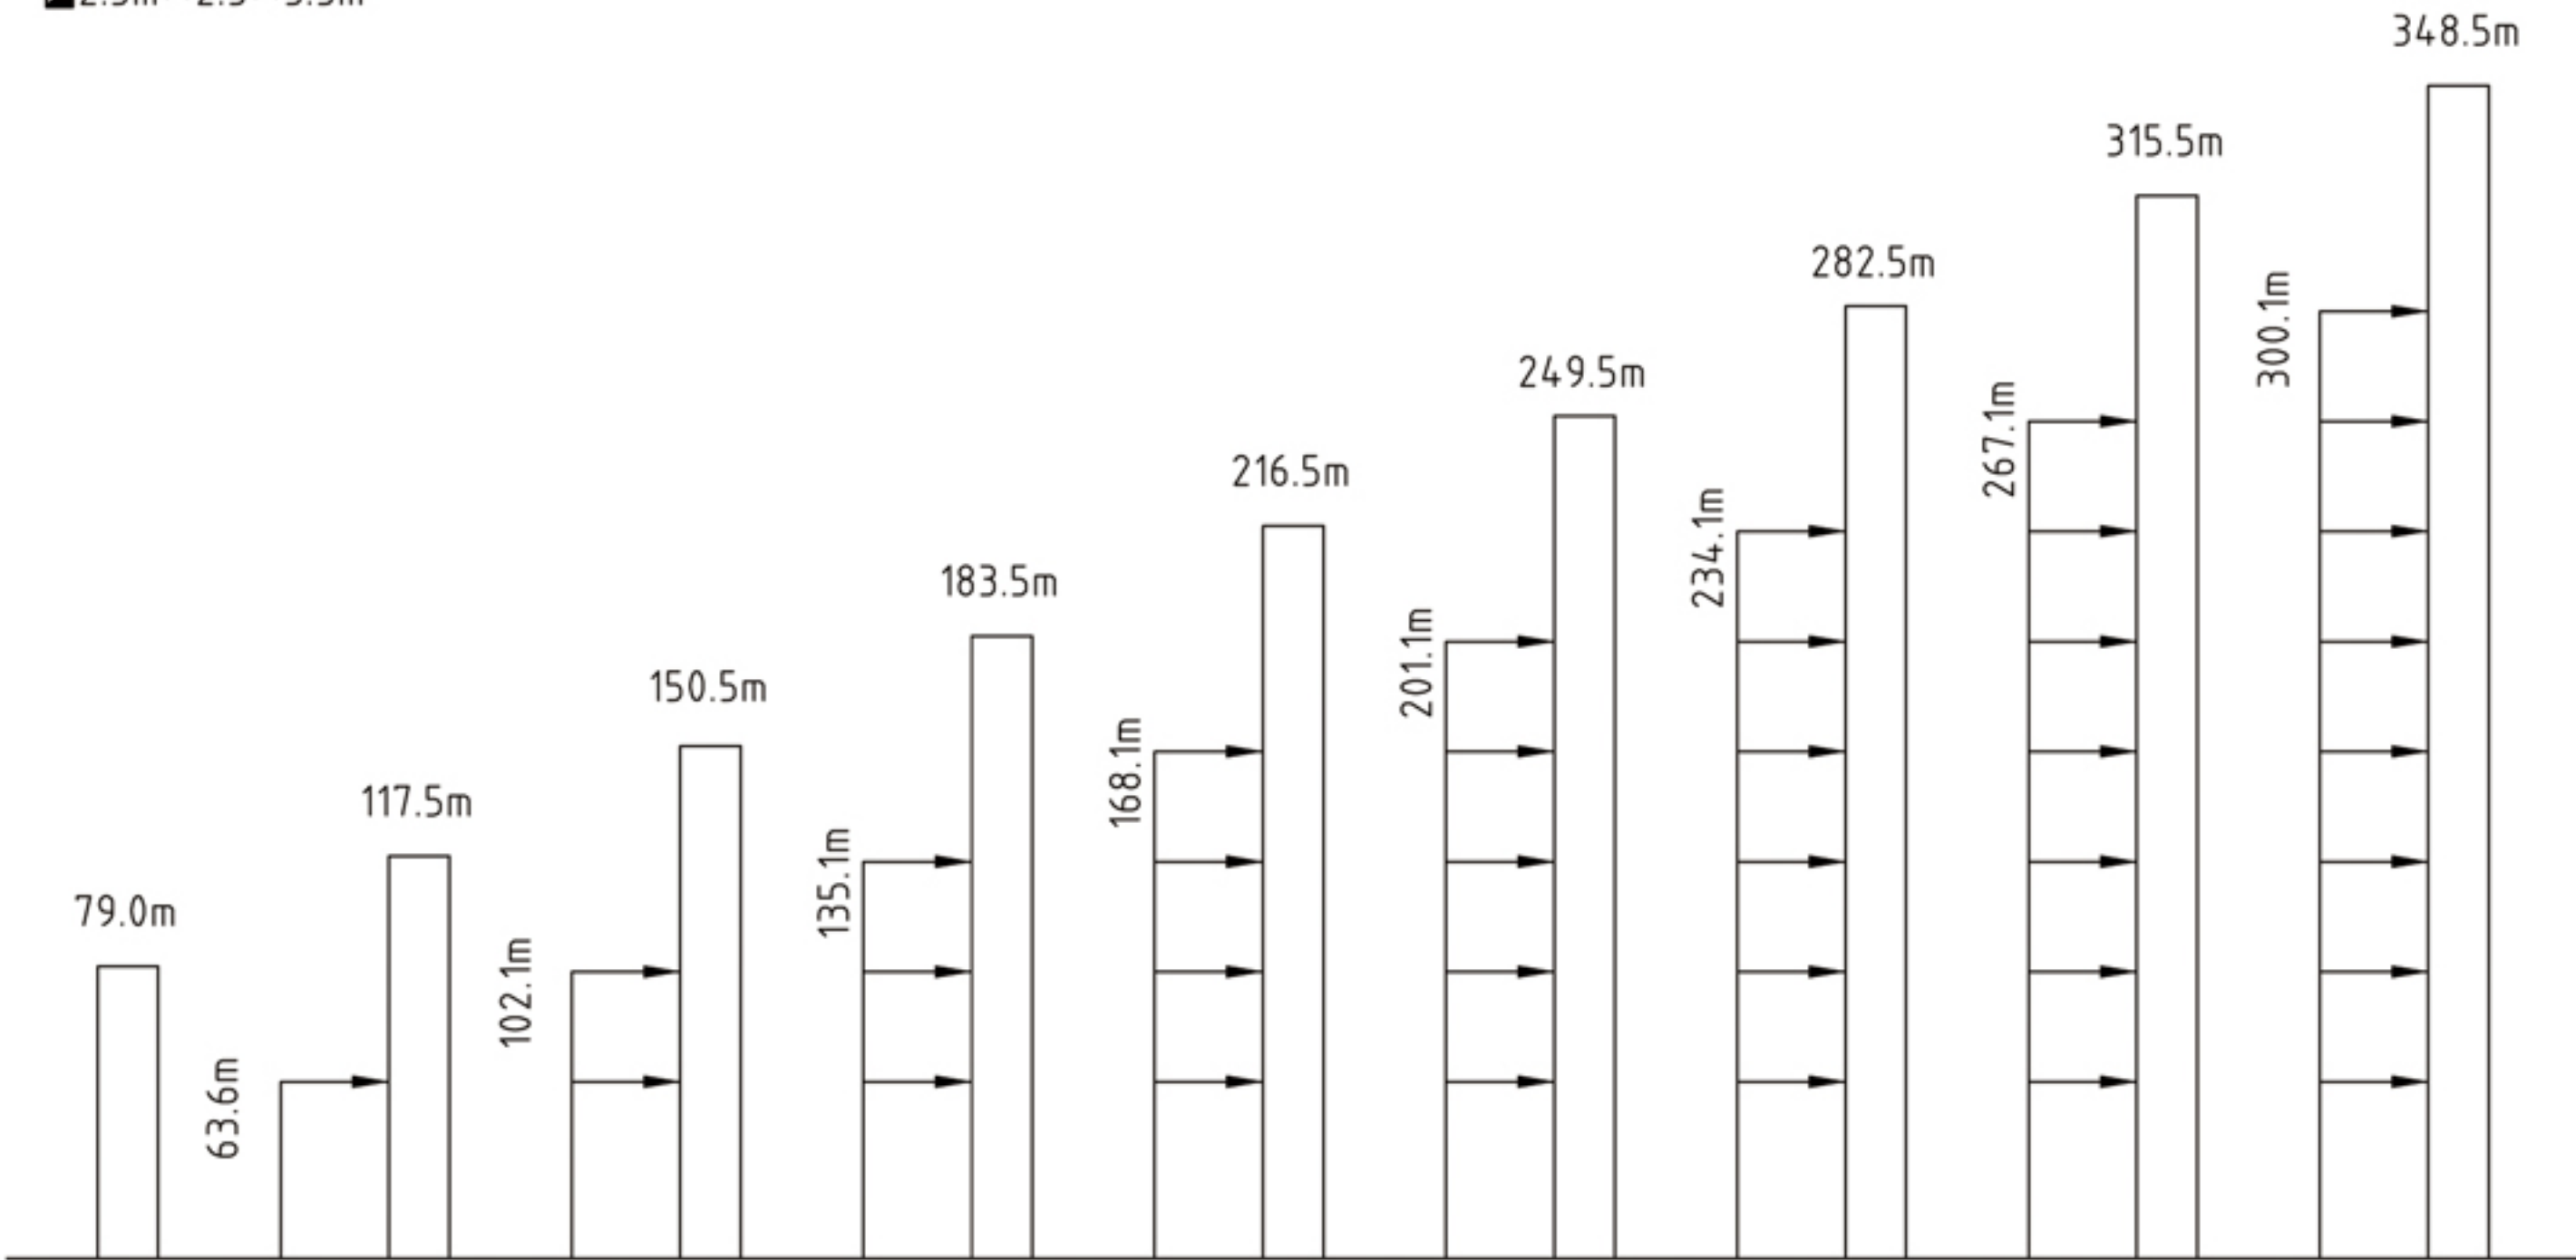

载荷特性表 Load Diagrams 25t

R(m)	FALL	R(min/max)	25	30	35	40	45	50	55	60	65	70	75	80	85
85m		4.2~14.1	12.92	10.32	8.46	7.07	5.98	5.12	4.41	3.81	3.31	2.88	2.51	2.19	1.90
		4.2~27.3	12.5	11.42	9.56	8.17	7.08	6.22	5.51	4.91	4.41	3.98	3.61	3.29	3.00
80m		4.2~16.5	15.61	12.58	10.41	8.79	7.52	6.51	5.68	5.0	4.41	3.91	3.48	3.10	
		4.2~32.5	12.5	12.5	11.51	9.89	8.62	7.61	6.78	6.10	5.51	5.01	4.58	4.20	
75m		4.2~17.6	16.87	13.65	11.35	9.63	8.29	7.22	6.34	5.61	4.99	4.46	4.0		
		4.2~34.9	12.5	12.5	12.45	10.73	9.39	8.32	7.44	6.71	6.09	5.56	5.10		
70m		4.2~19.0	18.48	15.04	12.58	10.73	9.30	8.15	7.21	6.43	5.77	5.20			
		4.2~38.0	12.5	12.5	12.5	11.83	10.4	9.25	8.31	7.53	6.87	6.30			
65m		4.2~20.5	20.08	16.35	13.68	11.68	10.13	8.88	7.87	7.02	6.30				
		4.2~40.8	12.5	12.5	12.5	12.5	11.23	9.98	8.97	8.12	7.40				
60m		4.2~23.2	23.01	18.75	15.71	13.43	11.65	10.23	9.07	8.10					
		4.2~45.8	12.5	12.5	12.5	12.5	12.5	11.33	10.17	9.20					
55m		4.2~24.0	23.89	19.46	16.30	13.93	12.08	10.61	9.40						
		4.2~47.2	12.5	12.5	12.5	12.5	12.5	11.71	10.5						
50m		4.2~25.3	25.0	20.65	17.31	14.81	12.86	11.3							
		4.2~49.6	12.5	12.5	12.5	12.5	12.5	12.4							
45m		4.2~26.5	25.0	21.76	18.26	15.64	13.6								
		4.2~45.0	12.5	12.5	12.5	12.5	12.5								
40m		4.2~27.1	25.0	22.24	18.56	15.8									
		4.2~40.0	12.5	12.5	12.5	12.5									
35m		4.2~27.2	25.0	22.31	18.60										
		4.2~35.0	12.5	12.5	12.5										
30m		4.2~27.2	25.0	22.30											
		4.2~30.0	12.5	12.5											

机构 Mechanisms 25t

名称 Name						容绳量 Drum capacity	电机功率 Motor power
		m/min	t	m/min	t	m	kW
起升 Hoisting	90JLF65	0-100	1.9	0-50	3.8	813	90
变幅 Trolley	11JXF16	0-43 m/min					11
回转 Slewing	RVF7.5	0-0.7rpm					7.5×4
电源 Power	380V(±10%)/50Hz	131kW					

平衡重 Counter weight

			PHZ5700	PHZ4500	PHZ2000
85m	24.32m	30500KG	5	/	1
80m	24.32m	30500KG	5	/	1
75m	24.32m	29300KG	4	1	1
70m	24.32m	29300KG	4	1	1
65m	24.32m	29300KG	4	1	1
60m	24.32m	29300KG	4	1	1
55m	24.32m	28500KG	5	/	/
50m	20.32m	36200KG	6	/	1
45m	20.32m	34200KG	6	/	/
40m	20.32m	33000KG	5	1	/
35m	20.32m	28500KG	5	/	/
30m	20.32m	27300KG	4	1	/